


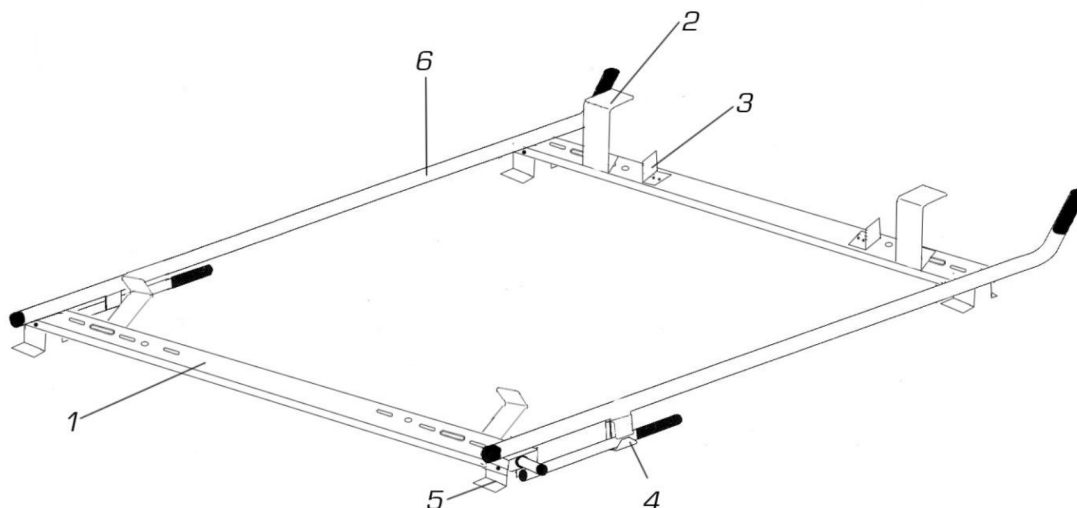

True Racks ladder rack system includes:

- * Powder coated aluminum crossbars.(1)
- * Powder coated aluminum Front Ladder Holders / Stoppers. (2)
- * Powder coated aluminum ladder positioners (3)
- * Ladder Locking / Quick Release Mechanism on curbside or / and street side.(4)
- * Four (4) powder coated aluminum mounting brackets - (assembly C-channel and roof angle) (5)
- * Side Support Tubes (6)
- * Mounting hardware.

Vehicles without rain gutter – Mounts directly to the roof. Some drilling required.

5CA-1, 6CA-1 Models Designed for one extension ladder, with lock on one side - Single Lock Down.

5CA-2, 6CA-2 Models Designed two extension ladders, with 2 ladder locks - Double Lock Down.

Ladder Racks Assembling: 1. Assemble Ladder Rack on the floor. Fit all tubing together with cross bars at their assembly points, aligning all the holes for the bolts you will install.

2.Once the basic frame of the ladder rack is assembled, secure ladder rack frame using the bolts and washers provided.

3. Your ladder rack includes support brackets (5) that hold Ladder Rack on vehicle's roof. Assemble these and attach to ladder rack before installing.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS, AND CAUTIONS. USE THIS PRODUCT CORRECTLY, AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.

Installation Instructions - Aluminum Ladder Rack 5CA, 6CA series - Roof Mounted.

Tools / Material Required: 1.Cordless Drill; 2.Impact Driver; 3.1/2 Nut Driver Socket. 4. Drill Bit (according the size of plus nut provided) 5.Plus nut Installation Tool (provided in the Package)

		
1. Cordless Drill	2.Impact Driver	3. Nut Driver (1/2)
		
4.Drill Bit (1/2 inch)	5. Ratchet	6.Water Resistant Silicone

 **IMPORTANT:** It may require two people to install this Ladder Rack correctly.
Uninstall Original factory roof rails/luggage carrier. Clean the roof with dry cloth from any stains and debris.
Lift the rack and position it on the vehicle.

- Position assembly on your vehicle's roof and center the mounting assembly on the vehicle's top. The roof of your vehicle may taper off in one direction, so ensure that the mounting assembly will provide an even distribution of the weight being applied when a ladder is added to the roof.

Mark through the slots of Roof Mounting Brackets - 4 drilling points, 1 on each Mounting Brackets



Pos.1

- Drill with 1/2 inch drill bit all marks at rear and at front of the vehicles' roof. **Do Not apply too much pressure while drilling as this may cause in damaging roof liner / interior liner. Wear protective glasses when drilling!**



Pos. 2



- Clean area around holes, put silicone around all holes and place rubber pads. Make sure all holes in rubber pads match holes on vehicle's roof.




Pos.3

- Put Silicone around all holes/plus nuts and install Rubber Pad (provided) over holes. Make this procedure for all installation points.

- Lift Ladder Rack and position it on your vehicle's roof to match mounting bracket's slots over installation points.

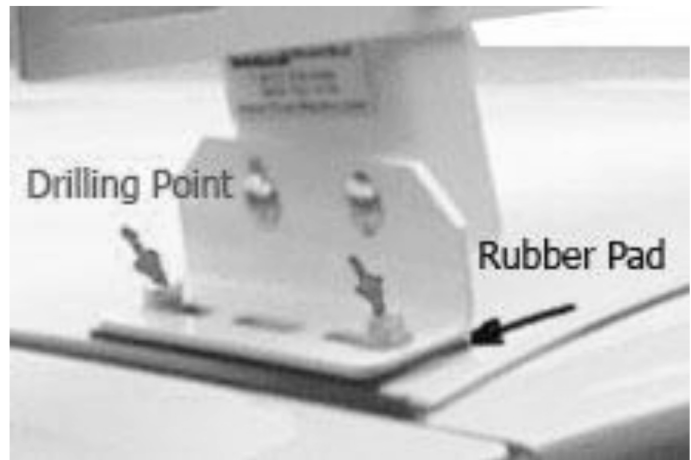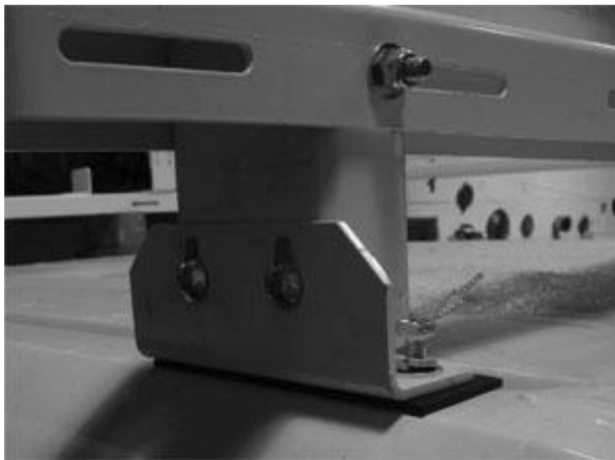

Pos.5, 6 Pictures of Assembly Process and Assembled Ladder Rack available separately

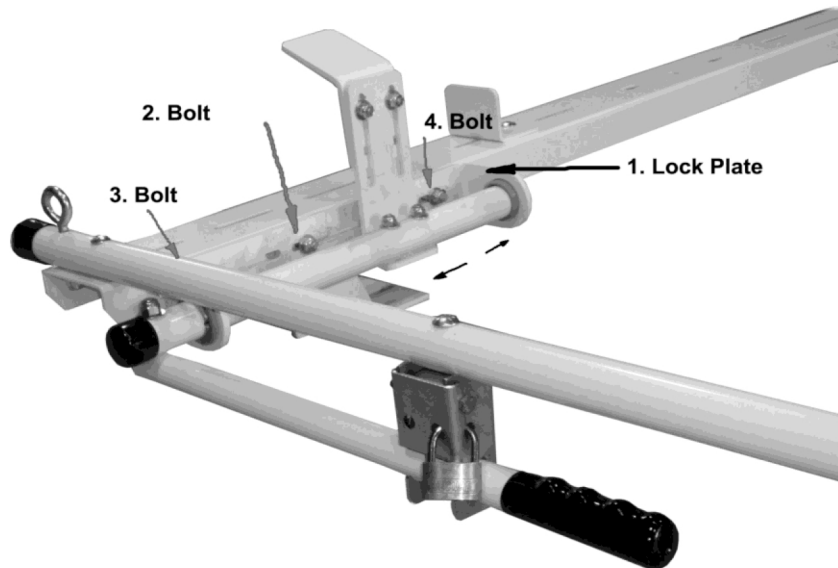

Please Scan QR Codes to watch Assembly & Installation Video



 **Do Not use the ladder rack if any parts missing or damaged, as this may cause failure or/and personal injury.**

WARNING! The user must secure the clamps and any ladders properly, checking the security frequently when in use.
WARNING! Remove any loose objects from the ladders.

WARNING! Avoid any protrusions beyond the side of the vehicle as these may present a risk of injury to passers-by.

DO NOT Use the ladder rack clamps for any purpose other than that for which they are designed.
DO NOT Secure any other items using the clamps. These are designed for ladders only.

WARNING! Drive carefully - reduce speed accordingly when transporting ladders.
Before every use check the clamps for security of fittings or any sign of wear and tear. Replace any worn or damaged parts.

WARNING! Remember the driver of the vehicle is responsible for the security and safety of the load carried. Check the ladders are stable before transit.

WARNING! The warnings, cautions and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood that common sense and caution are factors which cannot be built into this product, but must be applied by the operator.

 **IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS, AND CAUTIONS. USE THIS PRODUCT CORRECTLY, AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY